


Sechskantschraube mit Gewinde bis Kopf DIN 933, Stahl 8.8, verzinkt blau passiviert (A2K)

Normen	DIN 933
Werkstoff	Stahl
Festigkeitsklasse	8.8
Oberfläche	Verzinkt
RoHS-konform	Ja

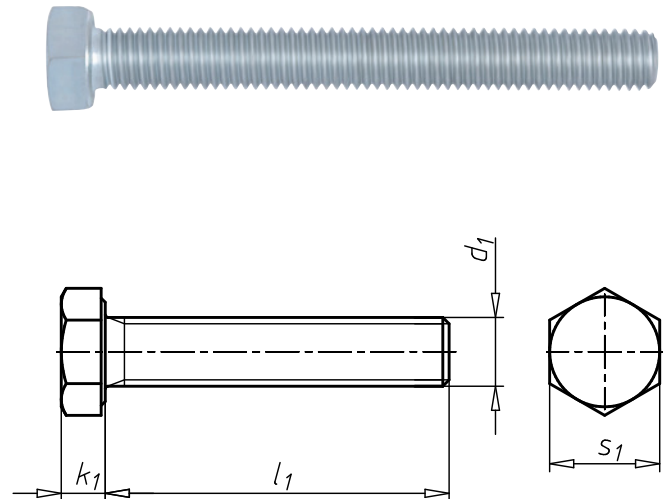

Gewindeart x Nenn-durchmesser (d ₁)	Länge (l ₁)	Kopfhöhe (k ₁)	Außenantrieb (s ₁)	Art.-Nr.	VE
M7	25 mm	4,8 mm	SW11	0057 7 25	200
M7	30 mm	4,8 mm	SW11	0057 7 30	200
M10	8 mm	6,4 mm	SW17	0057 10 8	100
M10	10 mm	6,4 mm	SW17	0057 10 10	200
M10	12 mm	6,4 mm	SW17	0057 10 12	200
M10	14 mm	6,4 mm	SW17	0057 10 14	100
M10	16 mm	6,4 mm	SW17	0057 10 16	100
M10	18 mm	6,4 mm	SW17	0057 10 18	200
M10	20 mm	6,4 mm	SW17	0057 10 20	25/100
M10	22 mm	6,4 mm	SW17	0057 10 22	200
M10	25 mm	6,4 mm	SW17	0057 10 25	25/100
M10	28 mm	6,4 mm	SW17	0057 10 28	200
M10	30 mm	6,4 mm	SW17	0057 10 30	25/100
M10	35 mm	6,4 mm	SW17	0057 10 35	25/100
M10	40 mm	6,4 mm	SW17	0057 10 40	25/100
M10	45 mm	6,4 mm	SW17	0057 10 45	25/100
M10	50 mm	6,4 mm	SW17	0057 10 50	25/100
M10	55 mm	6,4 mm	SW17	0057 10 55	25/50
M10	60 mm	6,4 mm	SW17	0057 10 60	25/50
M10	65 mm	6,4 mm	SW17	0057 10 65	50
M10	70 mm	6,4 mm	SW17	0057 10 70	25
M10	75 mm	6,4 mm	SW17	0057 10 75	25
M10	80 mm	6,4 mm	SW17	0057 10 80	25
M10	85 mm	6,4 mm	SW17	0057 10 85	100
M10	90 mm	6,4 mm	SW17	0057 10 90	25
M10	100 mm	6,4 mm	SW17	0057 10 100	25/100
M10	110 mm	6,4 mm	SW17	0057 10 110	25
M10	120 mm	6,4 mm	SW17	0057 10 120	25
M10	125 mm	6,4 mm	SW17	0057 10 125	50
M10	130 mm	6,4 mm	SW17	0057 10 130	50
M10	140 mm	6,4 mm	SW17	0057 10 140	50

Gewindeart x Nenn- durchmesser (d ₁)	Länge (l ₁)	Kopfhöhe (k ₁)	Außenantrieb (s ₁)	Art.-Nr.	VE
M10	150 mm	6,4 mm	SW17	0057 10 150	50
M10	180 mm	6,4 mm	SW17	0057 10 180	50
M10	200 mm	6,4 mm	SW17	0057 10 200	50
M12	12 mm	7,5 mm	SW19	0057 12 12	100
M12	14 mm	7,5 mm	SW19	0057 12 14	100
M12	16 mm	7,5 mm	SW19	0057 12 16	100
M12	18 mm	7,5 mm	SW19	0057 12 18	100
M12	20 mm	7,5 mm	SW19	0057 12 20	50/100
M12	22 mm	7,5 mm	SW19	0057 12 22	100
M12	25 mm	7,5 mm	SW19	0057 12 25	50/100
M12	28 mm	7,5 mm	SW19	0057 12 28	100
M12	30 mm	7,5 mm	SW19	0057 12 30	50/100
M12	35 mm	7,5 mm	SW19	0057 12 35	100
M12	40 mm	7,5 mm	SW19	0057 12 40	50/100
M12	45 mm	7,5 mm	SW19	0057 12 45	50/100
M12	50 mm	7,5 mm	SW19	0057 12 50	50
M12	55 mm	7,5 mm	SW19	0057 12 55	50
M12	60 mm	7,5 mm	SW19	0057 12 60	25/50
M12	65 mm	7,5 mm	SW19	0057 12 65	50
M12	70 mm	7,5 mm	SW19	0057 12 70	25/50
M12	75 mm	7,5 mm	SW19	0057 12 75	50
M12	80 mm	7,5 mm	SW19	0057 12 80	25/50
M12	85 mm	7,5 mm	SW19	0057 12 85	50
M12	90 mm	7,5 mm	SW19	0057 12 90	25/50
M12	95 mm	7,5 mm	SW19	0057 12 95	50
M12	100 mm	7,5 mm	SW19	0057 12 100	25
M12	110 mm	7,5 mm	SW19	0057 12 110	25
M12	120 mm	7,5 mm	SW19	0057 12 120	25
M12	130 mm	7,5 mm	SW19	0057 12 130	25
M12	140 mm	7,5 mm	SW19	0057 12 140	25
M12	150 mm	7,5 mm	SW19	0057 12 150	25
M12	160 mm	7,5 mm	SW19	0057 12 160	25
M12	170 mm	7,5 mm	SW19	0057 12 170	25
M12	180 mm	7,5 mm	SW19	0057 12 180	25
M12	190 mm	7,5 mm	SW19	0057 12 190	25
M12	200 mm	7,5 mm	SW19	0057 12 200	25
M12	220 mm	7,5 mm	SW19	0057 12 220	25
M12	280 mm	7,5 mm	SW19	0057 12 280	25
M12	340 mm	7,5 mm	SW19	0057 12 340	25
M14	20 mm	8,8 mm	SW22	0057 14 20	100
M14	25 mm	8,8 mm	SW22	0057 14 25	100
M14	30 mm	8,8 mm	SW22	0057 14 30	100
M14	35 mm	8,8 mm	SW22	0057 14 35	100
M14	40 mm	8,8 mm	SW22	0057 14 40	50/100
M14	45 mm	8,8 mm	SW22	0057 14 45	50
M14	50 mm	8,8 mm	SW22	0057 14 50	25/50
M14	55 mm	8,8 mm	SW22	0057 14 55	50
M14	60 mm	8,8 mm	SW22	0057 14 60	25/50
M14	65 mm	8,8 mm	SW22	0057 14 65	50
M14	70 mm	8,8 mm	SW22	0057 14 70	50
M14	75 mm	8,8 mm	SW22	0057 14 75	50
M14	80 mm	8,8 mm	SW22	0057 14 80	25/50
M14	85 mm	8,8 mm	SW22	0057 14 85	50
M14	90 mm	8,8 mm	SW22	0057 14 90	50

Gewindeart x Nenn- durchmesser (d ₁)	Länge (l ₁)	Kopfhöhe (k ₁)	Außenantrieb (s ₁)	Art.-Nr.	VE
M14	95 mm	8,8 mm	SW22	0057 14 95	25
M14	100 mm	8,8 mm	SW22	0057 14 100	50
M14	110 mm	8,8 mm	SW22	0057 14 110	25
M14	120 mm	8,8 mm	SW22	0057 14 120	50
M14	130 mm	8,8 mm	SW22	0057 14 130	50
M14	140 mm	8,8 mm	SW22	0057 14 140	25
M14	150 mm	8,8 mm	SW22	0057 14 150	50
M14	160 mm	8,8 mm	SW22	0057 14 160	25
M14	200 mm	8,8 mm	SW22	0057 14 200	25
M22	40 mm	14 mm	SW32	0057 22 40	25
M22	50 mm	14 mm	SW32	0057 22 50	25
M22	55 mm	14 mm	SW32	0057 22 55	25
M22	60 mm	14 mm	SW32	0057 22 60	25
M22	70 mm	14 mm	SW32	0057 22 70	25
M22	80 mm	14 mm	SW32	0057 22 80	25
M22	90 mm	14 mm	SW32	0057 22 90	25
M22	100 mm	14 mm	SW32	0057 22 100	25
M22	110 mm	14 mm	SW32	0057 22 110	10
M22	120 mm	14 mm	SW32	0057 22 120	10
M22	160 mm	14 mm	SW32	0057 22 160	10

Hinweis

DIN 933 wurde zurückgezogen und durch ISO 4017 ersetzt. Es besteht Austauschbarkeit (Nennmaße erweitert | Schlüsselweiten bei M10, M12, M14 und M22 geändert).