


## Federring mit rechteckigem Querschnitt Form B DIN 127, Edelstahl A2 blank

|              |              |
|--------------|--------------|
| Werkstoff    | Edelstahl A2 |
| Oberfläche   | Blank        |
| RoHS-konform | Ja           |
| Form         | B            |

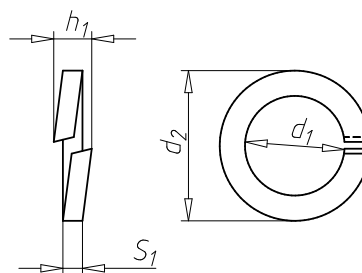

| Passend für Schraubengevinde | Innendurchmesser (d <sub>1</sub> ) | Außendurchmesser (d <sub>2</sub> ) | Höhe (h <sub>1</sub> ) | Dicke (s <sub>1</sub> ) | Art.-Nr.       | VE           |
|------------------------------|------------------------------------|------------------------------------|------------------------|-------------------------|----------------|--------------|
| M2,5                         | 2,7 mm                             | 5,1 mm                             | 1,2 mm                 | 0,6 mm                  | <b>0447 25</b> | 1000         |
| M2,6                         | 2,7 mm                             | 5,2 mm                             | 1,2 mm                 | 0,6 mm                  | <b>0447 26</b> | 1000         |
| M3                           | 3,1 mm                             | 6,2 mm                             | 1,6 mm                 | 0,8 mm                  | <b>0447 3</b>  | 500          |
| M3,5                         | 3,6 mm                             | 6,7 mm                             | 1,6 mm                 | 0,8 mm                  | <b>0447 35</b> | 1000         |
| M4                           | 4,1 mm                             | 7,6 mm                             | 1,8 mm                 | 0,9 mm                  | <b>0447 4</b>  | 100/500      |
| M5                           | 5,1 mm                             | 9,2 mm                             | 2,4 mm                 | 1,2 mm                  | <b>0447 5</b>  | 100/500      |
| M6                           | 6,1 mm                             | 11,8 mm                            | 3,2 mm                 | 1,6 mm                  | <b>0447 6</b>  | 100/500      |
| M8                           | 8,1 mm                             | 14,8 mm                            | 4 mm                   | 2 mm                    | <b>0447 8</b>  | 100/300/1000 |
| M10                          | 10,2 mm                            | 18,1 mm                            | 4,4 mm                 | 2,2 mm                  | <b>0447 10</b> | 100/500/1000 |
| M12                          | 12,2 mm                            | 21,1 mm                            | 5 mm                   | 2,5 mm                  | <b>0447 12</b> | 100/500      |
| M14                          | 14,2 mm                            | 24,1 mm                            | 6 mm                   | 3 mm                    | <b>0447 14</b> | 100          |
| M16                          | 16,2 mm                            | 27,4 mm                            | 7 mm                   | 3,5 mm                  | <b>0447 16</b> | 50/100       |
| M18                          | 18,2 mm                            | 29,4 mm                            | 7 mm                   | 3,5 mm                  | <b>0447 18</b> | 200          |
| M20                          | 20,2 mm                            | 33,6 mm                            | 8 mm                   | 4 mm                    | <b>0447 20</b> | 50/100       |
| M22                          | 22,5 mm                            | 35,9 mm                            | 8 mm                   | 4 mm                    | <b>0447 22</b> | 100          |
| M24                          | 24,5 mm                            | 40 mm                              | 10 mm                  | 5 mm                    | <b>0447 24</b> | 50           |
| M27                          | 27,5 mm                            | 43 mm                              | 10 mm                  | 5 mm                    | <b>0447 27</b> | 50           |
| M30                          | 30,5 mm                            | 48,2 mm                            | 12 mm                  | 6 mm                    | <b>0447 30</b> | 50           |
| M36                          | 36,5 mm                            | 58,2 mm                            | 12 mm                  | 6 mm                    | <b>0447 36</b> | 25           |
| M42                          | 42,5 mm                            | 68,2 mm                            | 14 mm                  | 7 mm                    | <b>0447 42</b> | 25           |

## Details/Anwendung

